


ANSI Pump Guards

ANSI Pump Guards - ANSI/OSHA Compliant - Nonmetallic guards will not dent or rust. Cantilevered guard bolts direct to rear of the pump and eliminates drilling base plates to mount guards. ANSI Pumps Guards install in just a couple of minutes and can be removed and remounted in about two minutes. All Uniguard Machine Guards are UV Protected for outdoor use.

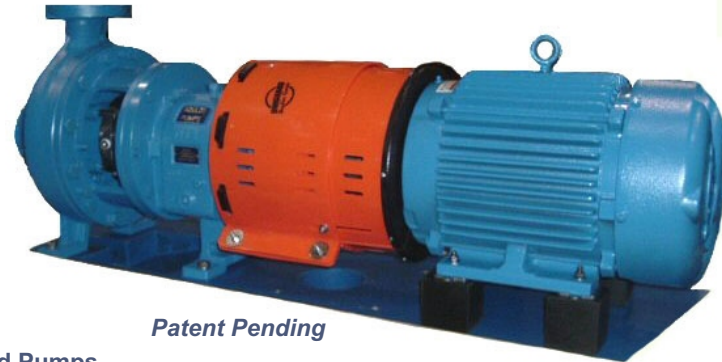

ANSI Guard Specifications

Adapter Plates to Fit Many Popular Brand Pumps

Fits Gould Model #'s	Min. Width		Max. Width		I. D.		Shaft Opening	
	In	MM	In	MM	In	MM	In	MM
ANSI-STX	6.62	168	9.62	244	8.00	203	4.25	108
ANSI-MTX	7.50	190	12.62	321	10.25	260	4.75	121
ANSI-LTX	14.50	368	19.75	502	16.12	410	9.25	235
ANSI-3410-S	7.43	189	10.69	271	16.12	410	9.25	235
ANSI-3410-M	7.43	189	10.69	271	16.12	410	9.25	235
ANSI-3410-L	7.56	192	12.25	311	16.12	410	9.25	235
ANSI-3175-S	14.50	368	19.75	502	16.12	410	9.25	235
ANSI-3175-M	18.38	467	23.62	600	16.12	410	9.25	235
ANSI-3175-L	18.50	470	25.25	641	19.75	502	10.00	254

